
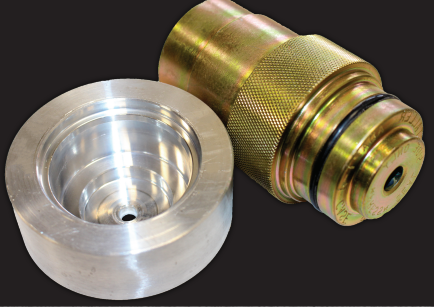


T-LMNOPAC

Instructions

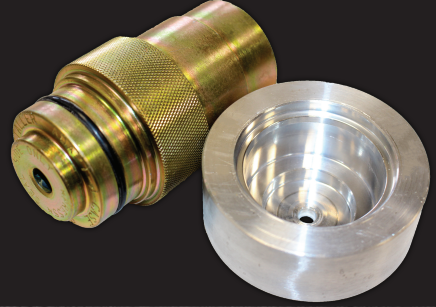

STOP


STOP

Read This!

STOP

This tool can only install a Durabond bushing no wider than 0.765” on a 6L50 / 80 / 90.

Place bell housing in PRESS, seal side up (NO HAMMERS).
Use tool with side A down. Remove bushing. (Fig A)

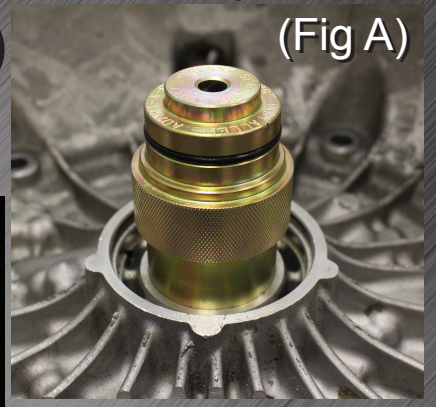

(Fig A)

Turn Over For Further Instructions

ADAPT-A-CASE

WORK SMARTER NOT HARDER


www.ADAPT-A-CASE.com

Made in the USA



T-LMNOPAC


Instructions

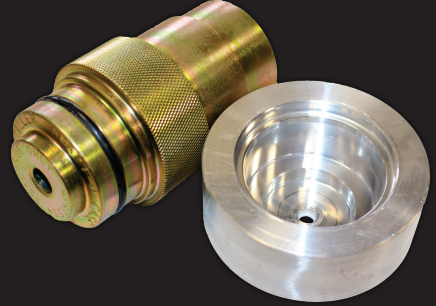


New bushing installs from pump side. Bushing goes on O-ring Side B. Press until tool stops. (Fig B) Test bushing on a torque converter.

Put aluminum seal installer on O-ring side of tool side B. (Fig C) Install seal, then snap ring.

(Fig B)

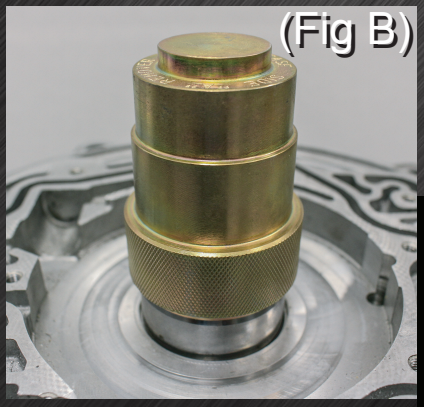

(Fig C)

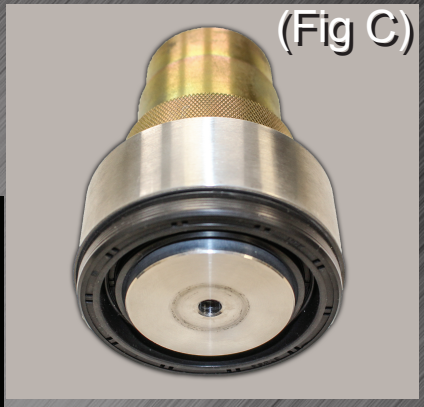

ADAPT-A-CASE

WORK SMARTER NOT HARDER

www.ADAPT-A-CASE.com

Made in the USA